
LedKoning

ROOD COB LED STRIP

384
LEDS P/M

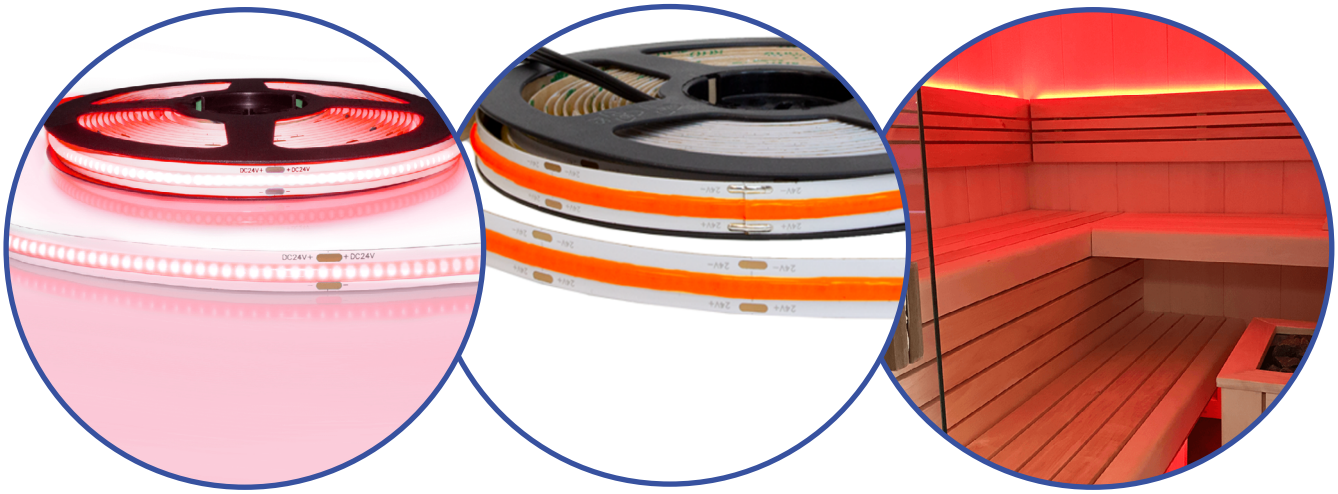

Rood


CE | Dimbaar | LM 95.76 | 180° | 2 Jaar

SPECIFICATIES


Dimbaar	Ja		
3M plakstrip over gehele lengte	Ja		
Garantie	5 jaar		
Op maat te knippen	Elke 8,3 cm		
Aantal LED's p/m	384		
Type LED	COB		
Stralingshoek	180 graden		
Kleur	Rood		
Kleurtemperatuur (Kelvin)	-		
CRI	-		
Lichtsterkte (lumen) p/m	95.76 lm		
Aantal branduren	50.000		
Voltage (DC)	24V		
Watt - vermogen p/m	8.5W		
Lumen per Watt	11.16 lm		
Watt per LED	0,02W		
Bescherming	IP20, IP65 of IP67		
Materiaal waterdichte bescherming (IP65/IP67)	Siliconen		
Achtergrond kleur strip (PCB)	Wit		
Plakstrip	IP20: 3M 300LSE		
Breedte led strip	IP20: 8mm	IP65: 10mm	IP67: 10mm
Dikte led strip	IP20: 1,7mm	IP65: 3,7mm	IP67: 3,7mm
Aansluiting begin	5.5x2.1 DC stekker type vrouw		
Aansluiting einde	5.5x2.1 DC stekker type man		

TECHNISCHE TEKENINGEN

IP20

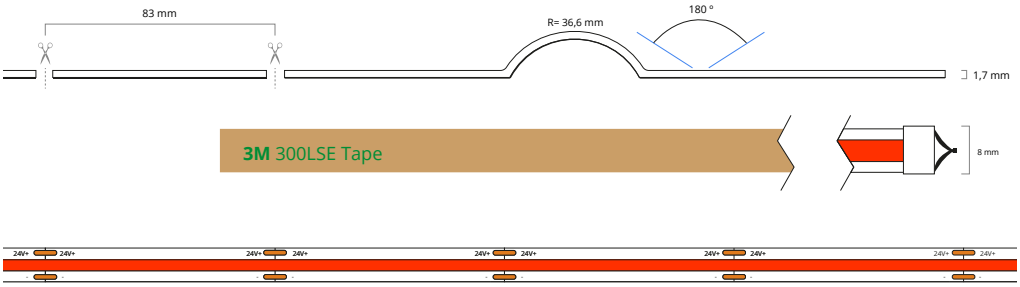

IP65/67

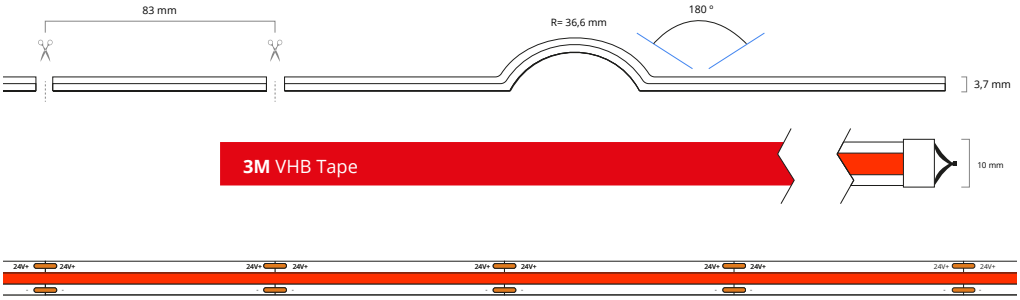

IP20



IP65




IP67





1M COB ROOD - 384 LEDS P/M

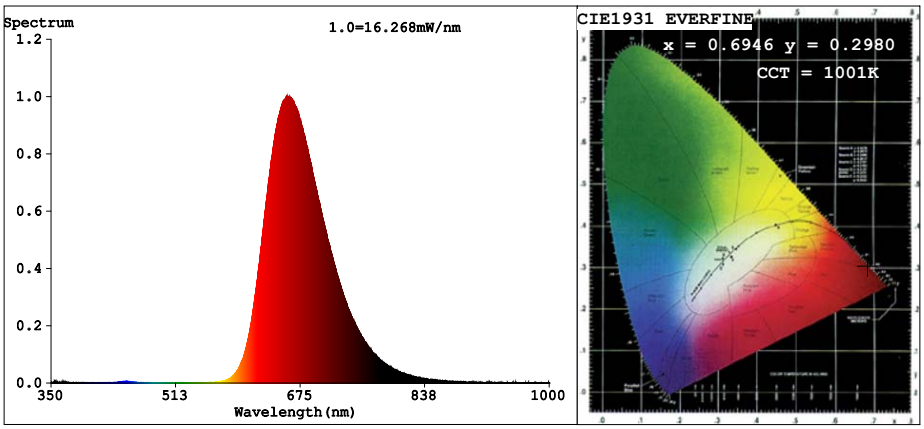

Color Parameters:

Chromaticity Coordinate:x=0.6946 y=0.2980/u'=0.5357 v'=0.5171
CCT=1001K(Duv=-0.0883) Dominant WL:Ld =626.2nm Purity=97.8%
Ratio:R=92.8% G=7.1% B=0.1% Peak WL:Lp=658.2nm FWHM=86.2nm
Render Index:Ra=36.8 CRI=40.5

R1 =23	R2 =80	R3 =46	R4 =0	R5 =23	R6 =79	R7 =43	
R8 =0	R9 =0	R10=80	R11=1	R12=85	R13=40	R14=66	R15=7

Photo Parameters:

Flux = 95.76 lm Eff. : 11.16 lm/W Fe = 1.556 W

Electrical parameters:

V = 23.997 V I = 0.3577 A P = 8.584 W PF = 1.000
LEVEL:OUT WHITE:OUT

Status: Integral T = 268 ms Ip = 51305 (78%)

CE CERTIFICAAT

AN XIN TESTING CERTIFICATION • • • AN XIN TESTING CERTIFICATION

Certificate of Conformity

ANXIN TESTING

Certification No.	:	**ATT20092500368E**
Applicant	:	**Ledkoning**
Address	:	**Rietveldenweg 49D** **5222AP 's Hertogenbosch, The Netherlands**
Manufacturer	:	**Ledkoning**
Address	:	**Rietveldenweg 49D** **5222AP 's Hertogenbosch, The Netherlands**
Product Description	:	**2835 LED Strip**
Model	:	**24K2835-05M1220,24K2835-05M1265,30K2835-05M1220,30K2835-05M1265** **65K2835-05M1220,65K2835-05M1265,24K2835-05M2420,24K2835-05M2465** **30K2835-05M2420,30K2835-05M2465,65K2835-05M2420,65K2835-05M2465** **RO2835-05M1220,RO2835-05M1265,RO2835-05M2420,RO2835-05M2465** **GR2835-05M1220,GR2835-05M1265,GR2835-05M2420,GR2835-05M2465** **BL2835-05M1220,BL2835-05M1265,BL2835-05M2420,BL2835-05M2465** **OR2835-05M1220,OR2835-05M1265,OR2835-05M2420,OR2835-05M2465**
Trademark	:	**N/A**

The above products have been tested by us with listed standards and found in compliance with the Directive 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this Directive.

Test Standards	:	**EN 55015: 2019** **EN 61547: 2009** **EN 61000-3-2:2019** **EN 61000-3-3: 2013+A1:2019**

The certificate is based on a single evaluation of tested samples of above-mentioned product. It does not imply an assessment of the whole production and does not permit the use of the test laboratory logo.

CE

Authorized Signer: _____

Kevin Liu/Manager

Sep. 27, 2020

Shenzhen An-Xin Testing Service Co., Ltd.
Room 402-405, Floor 4th, Building C, Yuxing Technology Industrial Park, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China
☎ 86-0755-23009643 86-0755-23009643 http://www.anxinlab.com/

Adres: Rietveldenweg 49D, 5222AP 's Hertogenbosch
Tel: +3173 704 1100
E-mail: info@ledkoning.nl
Website: www.ledkoning.nl